



RECEIVED

MAY 13 2002

COPY OF PAPERS
ORIGINALLY FILED

Technology Center 2600

707 2681
3-2302
PATENT

S/N 09/977269

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE


Applicant:	Salonaho et al.	Examiner:	UNKNOWN
Serial No.:	09/977269	Group Art Unit:	2681
Filed:	10/12/01	Docket No.:	930.340USW1
Title:	METHOD FOR CONTROLLING TRANSMISSION POWER		

CERTIFICATE UNDER 37 C.F.R. 1.8: The undersigned hereby certifies that this Transmittal Letter and the paper, as described herein, are being deposited in the United States Postal Service, as first class mail, with sufficient postage, in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231 on 30 April 2002

Michael B. Lasky
Name

[Signature]
Signature

Group Art Unit 2681
Assistant Commissioner for Patents
Washington, D.C. 20231



- ☒ Certified copy of British Serial Number GB 9908518.5, filed 14 April 1999; Submission of
Priority Document
☒ Transmittal Sheet
☒ Return postcard

Authorization is hereby given to charge any additional fees or credit any overpayments that may be deemed necessary to Deposit Account Number 50-1038.

Respectfully submitted,

Altera Law Group, LLC
6500 City West Parkway, Suite 100
Minneapolis, MN 55344-7701
(952) 253-4106

Date: 30 April 2002

By:

[Signature]
Michael B. Lasky
Reg. No. 29,555
MBL/jsa



IN 09/977269

RECEIVED

MAY 13 2002

COPY OF PAPER
ORIGINAL FILED
PATENT

Technology Center 2600

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant:	Salonaho et al.	Examiner:	UNKNOWN
Serial No.:	09/977269	Group Art Unit:	2681
Filed:	10/12/01	Docket No.:	930.340USW1
Title:	METHOD FOR CONTROLLING TRANSMISSION POWER		

CERTIFICATE UNDER 37 C.F.R. 1.8: The undersigned hereby certifies that this Transmittal Letter and the paper, as described herein, are being deposited in the United States Postal Service, as first class mail, with sufficient postage, in an envelope addressed to: Assistant Commissioner for Patents, Washington, D.C. 20231 on 20/05/02

Michael B. Lasky
Name

[Signature]
Signature

SUBMISSION OF PRIORITY DOCUMENT

Group Art Unit 2681
Assistant Commissioner for Patents
Washington, D.C. 20231



Dear Sir:

Enclosed is a certified copy of British application, Serial Number GB9908518.5, filed 14 April 1999, the priority of which is claimed under 35 U.S.C. §119.

Respectfully submitted,

Altera Law Group, LLC
6500 City West Parkway, Suite 100
Minneapolis, MN 55344-7701
(952) 253-4106

Date: 30 April 2002

By: [Signature]

Michael B. Lasky
Reg. No. 29,555
MBL/jsa



INVESTOR IN PEOPLE



The Patent Office
Concept House
Cardiff Road
Newport
South Wales
NP10 8QQ

RECEIVED

MAY 13 2002

Technology Center 2600

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before re-registration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.


Signed

J. Evans

Dated

15.04.2002

CERTIFIED COPY OF
PRIORITY DOCUMENT



The
Patent
Office

15 APR 99 13:39:41 18 D00068
P01/77 0.00 9908518.5

Request for grant of a patent

(See the notes on the back of this form. You can also get an explanatory leaflet from the Patent Office to help you fill in this form)

The Patent Office

Cardiff Road
Newport
Gwent NP9 1RH

1. Your reference

91535/KCS/DG

2. Patent application number

(The Patent Office will fill in this part)

9908518.5

3. Full name, address and postcode of the or of each applicant (underline all surnames)

NOKIA TELECOMMUNICATIONS OY
KEILALAHDENTIE 4
02150 ESPOO
FINLAND

Patents ADP number (if you know it)

If the applicant is a corporate body, give the country/state of its incorporation

FINLAND

7298433001

4. Title of the invention

METHOD FOR CONTROLLING TRANSMISSION POWER

5. Name of your agent (if you have one)

"Address for service" in the United Kingdom to which all correspondence should be sent (including the postcode)

PAGE WHITE & FARRER
54 DOUGHTY STREET
LONDON
WC1N 2LS

Patents ADP number (if you know it)

1255003

6. If you are declaring priority from one or more earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (if you know it) the or each application number

Country

Priority application number
(if you know it)

Date of filing
(day / month / year)

7. If this application is divided or otherwise derived from an earlier UK application, give the number and the filing date of the earlier application

Number of earlier application

Date of filing
(day / month / year)

8. Is a statement of inventorship and of right to grant of a patent required in support of this request? (Answer 'Yes' if:

YES

- a) any applicant named in part 3 is not an inventor, or
 - b) there is an inventor who is not named as an applicant, or
 - c) any named applicant is a corporate body.
- See note (d))

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form	-
Description	14
Claim(s)	8
Abstract	-
Drawing(s)	4

10. If you are also filing any of the following, state how many against each item.

Priority documents	-
Translations of priority documents	-
Statement of inventorship and right to grant of a patent (Patents Form 7/77)	-
Request for preliminary examination and search (Patents Form 9/77)	-
Request for substantive examination (Patents Form 10/77)	-
Any other documents (please specify)	-

11.

I/We request the grant of a patent on the basis of this application.

Signature

Page White & Farrer

Date

14.04.1999

PAGE WHITE & FARRER

12. Name and daytime telephone number of person to contact in the United Kingdom

KELDA STYLE - 0171 831 7929

Warning

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication or communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom, Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given, or any such direction has been revoked.

Notes

- If you need help to fill in this form or you have any questions, please contact the Patent Office on 0645 500505.
- Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheet of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- Once you have filled in the form you must remember to sign and date it.
- For details of the fee and ways to pay please contact the Patent Office.

METHOD FOR CONTROLLING TRANSMISSION POWER

FIELD OF THE INVENTION

5 The present invention relates to a method of controlling transmission power of a first station, in particular, but not exclusively a mobile station. The present invention also relates to a station for example a mobile station.

10 BACKGROUND TO THE INVENTION

The use of code division multiple access (CDMA) is being proposed for the next generation of cellular telecommunication networks. Additionally, code division multiple access is also being used
15 in the IS-95 Standard in the USA. CDMA is a direct sequence spread spectrum technique. In a wireless cellular network using CDMA, the mobile terminals in one cell associated with a first base station will use the same frequency as mobile stations in an adjacent cell associated with a second base station. The
20 different mobile stations can be distinguished by the respective base stations as each mobile station will be using a different spreading code.

In US-A-5101501 a CDMA system is described which uses "soft"
25 handoff. With soft handoff, a mobile station is capable of communicating with more than one base station at the same time. This will typically occur when the mobile station is close to the boundary defined between two cells. The signals sent by the mobile stations will be received and processed by both of the
30 base stations. Likewise, the mobile station will receive the same signal from the two base stations. The signals from the two base stations may be combined.

US-A-5265119 discloses a method of controlling the power of a
35 mobile station which is in communication with two or more base stations at the same time. Each base station which is in communication with the mobile station sends power control

commands to the mobile station. These power control commands will instruct the mobile station to increase or reduce the power with which it transmits signals to the base station. If a mobile station is in communication with more than one base station at the same time, the mobile station may receive conflicting power control commands from different base stations. Accordingly, the mobile station will only increase its transmission power if all the base stations which are in communication with the mobile station instruct the mobile station to increase its transmission power. The mobile station will decrease its transmission power if any one or more of the base stations which are in communication with the mobile station instruct the mobile station to reduce its transmission power.

However this approach has some problems. In particular, in order to be able to use this technique, the transmitter power control commands must be sent to the mobile station from the base station without any unnecessary delays. This is because the power control commands provided by the base station are determined based on the strength of signals received from the mobile station at the base station. In an environment which is changing quickly, the power control commands from the base station must be received by the mobile station before the environment has changed significantly if the power control commands are to be effective. In other words for effective power control the environment should change little during the time taken for a signal transmitted by the mobile station to be received by the base station, the power control command to be generated by the base station from the strength of the received signal and for the power control command to be transmitted to and received by the mobile station.

To avoid unnecessary delays, the power control commands are not error protected or only relatively weakly error protected. This means that there is a significant probability that there is an error in the power control command received at the mobile station. An error in the power control command may result in the mobile station increasing or decreasing its transmission power

in error. Over time, the errors caused by the power control command being incorrectly received by the mobile station will result in the energy per bit to noise (Eb/No) ratio unnecessarily varying. In an interference sensitive system such as CDMA, this may adversely affect the quality of communications and/or the capacity of the system.

It has been proposed that the reliability of the power control commands be estimated and that the mobile station only respond to reliable commands. The method which has been proposed to estimate the reliability of the power control commands uses signal to interference ratio (SIR) information. In particular the signal to interference ratio of other signals received by the mobile station from the base station in question is determined. If the ratio exceeds a given threshold, then the power control command from the base station in question is determined to be reliable. If the ratio falls below the threshold, then the power control command from the base station in question is determined to be unreliable and is ignored by the mobile station.

This method has the problem that this method relies on the set threshold for the signal to noise ratio to determine if the power control command is or is not reliable. This may result in accurately received power control commands being ignored.

SUMMARY OF THE INVENTION

It is an aim of embodiments of the present invention to provide a improved method for determining the reliability of power control commands received at, for example, mobile stations.

According to one aspect of the present invention, there is provided a method of controlling the power with which a first station transmits signals to a second station, comprising the steps of: transmitting from the second station to the first station a power control command having a given value; receiving said power control command at said first station; determining

from said received power control command a parameter representative of the quality with which the power control command is received at the first station; and controlling the power which the first station transmits signals based on the determination step.

Thus the quality with which the power control command itself is received is used unlike in the proposals discussed hereinbefore.

Preferably, in said determining step, the received value of said received power control command is determined as said parameter. It should be appreciated that the received power control value may differ from that which is transmitted due to the effects of the channel between the first and second stations. The received value may be the value after the decoding of the signal from the carrier wave but before the detection of individual power control bits transmitted to the first station by the second station.

Preferably, the method further comprising the steps of comparing said determined received value with a threshold value; determining the given value which was transmitted based on said comparing step; and in said controlling step controlling the power which the first station transmits signals based on the determined transmitted value. Thus the transmitted value is determined on the basis of the received value.

According to a second aspect of the present invention, there is provided a method of controlling the power with which a first station transmits signals to a plurality of second stations, comprising the steps of; transmitting from each of the second stations to the first station a power control command having a given value; receiving said power control commands at said first station; determining the received values of said received power control commands; combining the received values of said received power control commands; and controlling the power with which first station transmits to the second station based on said combined value.

It should be appreciated that in the third aspect of the present invention the actual received signal values can be used or the values which were determined to have been transmitted.

5 According to a third aspect of the present invention, there is provided a method of controlling the power with which a first station transmits signals to a second station, comprising the steps of; transmitting from the second station to the first station a plurality of power control commands; receiving said
10 power control commands at said first station; determining the value of said received power control values; controlling the power with which the first station transmits to the second station based on a currently received power control command and at least one previously received power control command.

15 According to a fourth aspect of the present invention there is provided a first station which in use transmits signals to a second station, said first station comprising: means for receiving a power control command transmitted from said second station to said first station, said power control command being
20 transmitted with a given value; determining means for determining from said received power control command a parameter representative of the quality with which the power control command is received at the first station; and control means for
25 controlling the power which the first station transmits signals based on the determination carried out by said determining means.

According to a further aspect of the present invention there is provided a first station which in use transmits signals to a plurality of second stations, said first station comprising:
30 means for receiving power control commands transmitted from said second stations to said first station, said power control commands being transmitted with given values; means for determining the received values of said received power control
35 commands; means for combining the received values of said received power control commands; and means for controlling the power with which first station transmits to the second station

based on said combined value.

According to a further aspect of the present invention, there is provided a first station which in use transmits signals to a second station, said first station comprising: means for receiving power control commands transmitted from said second station to said first station; means for determining the values of said received power control values; and means for controlling the power with which the first station transmits to the second station based on a currently received power control command and at least one previously received power control command.

According to a further aspect of the present invention, there is provided a method for controlling the power which a first station transmits signals to a second station comprising the steps of: transmitting from the second station to the first station a power control command; receiving said power control command at the first station; determining, using a plurality of different methods, power control information from said received power control command; and controlling the power with which the first station transmits to the second station based on the determination step.

BRIEF DESCRIPTION OF DRAWINGS

For a better understanding of the present invention and as to how the same may be carried into effect, reference will now be made by way of example to the accompanying drawings in which: Figure 1 shows a schematic diagram of part of a cellular telecommunications network incorporating base transceiver stations and mobile stations; Figure 2 shows the threshold used in a first embodiment; Figure 3 shows a schematic view of a second embodiment; Figure 4 shows a schematic view of a third embodiment; and Figures 5a to d show simulations of using the methods embodying the present invention.

5 DETAILED DESCRIPTION OF PREFERRED EMBODIMENTS

Reference will first be made to Figure 1 in which three cells 2 of a cellular telecommunications network are shown. Each cell 2 is served by a respective base transceiver station (BTS) 4. Each
10 base transceiver station 4 is arranged to transmit signals to and receive signals from the mobile stations 6 located in the cell associated with the given base transceiver station 4. Likewise, each mobile station 6 is able to transmit signals to and receive signals from the respective base transceiver station 4.

15 The cellular telecommunications network shown in Figure 1 uses a code division multiple access technique. Accordingly, at least some of the mobile stations will be in communication with more than one base station at the same time. This, however, will be
20 described in more detail hereinafter.

The power control method which is used when more than one base station is in communication with more than one mobile station will now be described.

25 The accuracy of the power control command is based on the quality of power control command received at the mobile station. This is instead of the signal to noise ratio approach which has previously been proposed. The power control command which is
30 transmitted by the base station can have one of two values. If the value of the command is "1", then the base station is instructing the mobile station to increase its transmission power. If the value of the command is "-1", then the base station is instructing the mobile station to decrease its transmission
35 power. In other embodiments of the present invention, the respective values may be "1" and "0" or any other suitable values.

40 However, due to the effects of interference or the like, the received symbols which are received at the mobile station will have been distorted and can in principle fall in the range of

5 values from $-\infty$ to $+\infty$. Typical values may fall inside the range
-1 to +1 or outside this range. Examples of typical values are
+5, .8, or -.4.

10 The power control command transmitted by the base station is
determined by the base station from the strength of signals
received from the mobile station. Based on the strength of the
received signals, the base station determines if the mobile
station should increase or decrease its transmission power. The
15 power control command values can alternatively be determined in
any suitable manner.

Reference is made to Figure 2 which shows how a decision is made
as to which of the two commands the mobile station has received.
A threshold value T is defined. If the value detected at the
20 mobile station is above the threshold T, then the value is
determined to be +1. If the value detected by the mobile station
is below the threshold T, the value is determined to be -1. As
can be seen from Figure 2, the threshold T may not be centrally
located at 0 between the extreme values at each end of the range.
25 In preferred embodiments, the threshold is between the values of
-.6 to 0. More preferably, the threshold is between the values
of -0.25 to -0.03. These values are appropriate in situations
where the noise has normalised. It should be appreciated that the
normalisation can be carried out in any appropriate way. The
30 values given by way of example for the threshold will be
dependent on the nature of the system including the method of
normalisation and therefore can be different to those suggested
hereinbefore.

35 This decision can be summarised as follows:
If the value of the power control command received at the mobile
station is greater than or equal to the threshold value (marked
A in Figure 2) then the power control command is +1.
In other cases (marked B in Figure 2) the the power control
40 command is -1.

5 If a mobile station is in communication with two or more base stations, the mobile station will receive a power control value from each base station. The power control value from each base station is determined as described hereinbefore. The power command signal from each of the base stations are compared and
10 the minimum power control command value is selected. In other words, if at least one base station instructs the mobile station to decrease its power, then the mobile station will decrease its power.

15 The threshold can be set so that the decrease power command is generally more accurate than the increase power command. This is because if a mobile station is interprets incorrectly the power control command and reduces the power instead of increasing it, then the connection between the mobile station and the base
20 station could be lost or adversely affected. This could be a problem particularly if successive increase power control commands are misinterpreted as decrease power control commands. Additionally since one decrease power control instruction from one of a plurality of base stations is enough to cause the mobile
25 station to decrease power, it is more likely that the power will be decreased in practice than increased, thus effectively compensating for the threshold being closer to the decrease power value than the increase power value. In alternative embodiments of the present invention, the threshold can be set so that the
30 increase power control command is more accurate than the decrease power command.

This method of determining the power control value may be used by mobile stations which are only in communication with a single
35 base station as well as by mobile stations in communication with a plurality of base stations.

Reference is now made to Figure 3 which illustrates a second embodiment of the present invention. The block diagram of Figure
40 3 illustrates figuratively elements present in a mobile station embodying the present invention. Each of the power control

5 commands received by the mobile station is input to a first determination unit 40 which determines the received value of each power command. The value of each power command can fall in the range mentioned in relation to the first embodiment. A determination is then made as to whether each power control
10 command represents 1 or -1 in a second determination unit 42. The second determination unit uses the method discussed in relation to Figure 2. The output of the second determination unit 42 will be the minimum of all of the power control values determined by the second determining unit 42.

15 The value of each power control command is output to a maximum ratio combining unit 44 which sums the values received from each of the base stations with which the mobile station is in communication. The actual values which are received are summed
20 eg .3 and -.5. In preferred embodiments of the invention, all the values are given equal weight. However in other embodiments of the invention, the values may be weighted with respect to each other.

25 The summed value from the maximum ratio combining unit 42 and the minimum value (either 1 or -1) output from the second determination unit 42 are input to decision unit 46 which determines which of the two inputs has the minimum value. The minimum value is output by the decision unit 46. This output will
30 control the transmission power of the mobile station and in particular whether it is decreased or increased. If the value from the second decision unit 42 is -1, the transmission power will be decreased regardless of the value output by the maximum ratio combining unit 44. If the output of the second
35 determination unit 42 is +1, the power will only be increased if the value of the maximum ratio combining unit 44 is above a given threshold. Otherwise, the power will be decreased. The threshold may be the same or different to the threshold used by the second determination unit 42.

40

It should be appreciated that in some embodiments of the present

5 invention, the maximum ratio unit may be provided without the
second determination unit and the decision as to whether to
increase or decrease the power is made based on the summed value.
A suitable threshold value is defined. If the sum is above the
threshold, the power is increased. Below the threshold, the power
10 is decreased. The summed value may be divided by the number of
power control values available.

Reference will now be made to Figure 4 which shows a third
embodiment of the present invention. The embodiment shown in
15 Figure 4 is the same as that shown in Figure 3 with the addition
of an integration unit 48 in parallel with the second
determination unit 42 and the maximum ratio combining unit 44.
The integration unit 48 is arranged to receive the received power
control values from the first determination unit 40. The minimum
20 power control value is selected by the integration unit 48. This
minimum power control value is added to minimum power control
values which have been received previously. If the resulting sum
is below a given threshold and the minimum power control value
indicates that the power should be increased, then the
25 integration unit 48 will output the value -1. In other words the
output of the integration unit will indicate that the power
should be decreased. When these circumstances occur, the sum will
be reset to a reset value of, for example 0. Otherwise the
integration unit 48 will output the selected minimum value. The
30 output of the integration unit 48 is input to the decision unit.

The threshold value may for example be -0.6. The purpose of the
integration unit is to prevent the power from being increased in
error particularly in response to power increase commands derived
35 from a received value which is close to the threshold. In other
words, if the power is increased too often in a given time frame,
the next command to increase power will be ignored and the power
will be decreased in that step. The threshold may be the same as
that used by the second determination unit but is preferably
40 different.

5 The behaviour of the integration unit can be summarised as follows:

sum of previous power command values and new power control value falls below the sum threshold and new power control value exceeds threshold which indicates that power control value represents an increase power command, then output a decrease power command and reset sum to 0 or any other appropriate reset value;

15 sum of previous power command values and new power control value falls below the sum threshold and new power control value falls below threshold which indicates that power control value represents an decrease power command, then output a decrease power command and reset the sum to its reset value;

20 sum of previous power command values and new power control value exceeds below the sum threshold and new power control value exceeds threshold which indicates that power control value represents an increase power command, then output an increase power command; and

25 sum of previous power command values and new power control value exceeds the sum threshold and new power control value falls below the threshold which indicates that power control value represents an decrease power command, then output an decrease power command and reset the sum to its reset value.

30 The decision unit 46 operates in the same manner as in the second embodiment except the minimum value of all three inputs are selected.

35 The integration unit 48 allows preceding power control commands to affect the behaviour of the mobile station taking into account the currently received power control command value. In other words a power control command history can be built up and used to influence current the power control behaviour of the mobile station.

40 In one modification of this embodiment, the integration unit 48 is arranged to process in parallel each of the power control

5 values from each of a plurality of base stations. The results of each of the separate summing may be input to the decision unit 46. Alternatively, the results of the summing may be combined together in any suitable manner before being input to the decision unit 46.

10 The embodiments described hereinbefore have included three different methods:

1. determining the value of a power command using a threshold value;

15 2. summing the received power control values to determine if the mobile station should increase or decrease its power; and

3. integrating the power command values with respect to time and ignoring commands to increase power in certain conditions.

20 Embodiments of the present invention may incorporate one, any two or three of the above methods. In other words the first method can be used on its own, with the second method or the third method, or with both the second and third methods. The second and third methods can also be used on their own or with each other.

25 Reference is made to Figures 5a to d which show simulations of the various methods. Each graph includes four curves. Curve A represents the prior art which uses the signal to interference ratio. Curve B represents a simulation using the first method. Curve C represents a simulation using the first and second methods. Curve D represents a simulation using the first, second and third methods. Figure 5a and 5b show the transmission power of a mobile station plotted against different threshold values for the first method. The mobile station is moving at 30 3km/h in both cases. With Figure 5a, the frame error rate is 1% whilst with Figure 5b the frame error rate is 10%. Figures 5c and 5d show the transmission power of a mobile station plotted against the speed of the mobile station. The frame error rate is 1% for the Figure 5c and 10% for Figure 5d.

40 As can be seen, use of the first method on its own reduces the

5 power transmitted by the mobile station significantly as compared to the prior art. The use of the first method in conjunction with the second method further reduces the power transmitted by the mobile station. The use of the first, second and third methods in combination still further reduces the power with which the
10 mobile station transmits without altering the performance.

In the preferred embodiment of the present invention, the mobile station will always be instructed by a base station to increase or decrease its power in, for example, 1dB steps. However in
15 alternative embodiments more than two power control commands may be provided. However additional threshold would have to be defined. For example, if three power control commands were available, two threshold would be defined. These three power control commands could be increase, decrease and stay the same.

20 It should be appreciated that any of the different method described hereinbefore can be used to determine whether or not a power control command value is reliable and accordingly whether or not the power control value should be considered or ignored.

25 The present embodiment has been described in the context of this CDMA system. However, it should be appreciated that embodiments of the present invention can be applied to any other suitable access technique including other spread spectrum techniques, frequency division multiple access, time division multiple access
30 and hybrids thereof.

The embodiments described hereinbefore have controlled the power with which a mobile station transmits power. The present
35 invention can also be used to control the transmission power of base stations. The invention can also be used with fixed stations, particularly where the radio environment varies over time..

5 CLAIMS

1. A method of controlling the power with which a first station transmits signals to a second station, comprising the steps of:
transmitting from the second station to the first station
10 a power control command having a given value;
receiving said power control command at said first station;
determining from said received power control command a
parameter representative of the quality with which the power
control command is received at the first station; and
15 controlling the power which the first station transmits
signals based on the determination step.
2. A method as claimed in claim 1, wherein in said determining
step, the received value of said received power control command
20 is determined as said parameter.
3. A method as claimed in claim 2, further comprising the steps
of comparing said determined received value with a threshold
value; determining the given value which was transmitted based
25 on said comparing step; and in said controlling step controlling
the power which the first station transmits signals based on the
determined transmitted value.
4. A method as claimed in any preceding claim, wherein said
30 first station is arranged to transmit signals to a plurality of
second stations, each of said second stations transmitting a
power control commands to said first station.
5. A method as claimed in claim 3 and 4, wherein the method
35 further comprises the step of selecting one of said determined
transmitted values in accordance with a predetermined criteria.
6. A method as claimed in any preceding claim, wherein said
transmitted power control command comprises one of a first value
40 indicating that the power should be increased and a second value
indicating that the power should be decreased.

- 5 7. A method as claimed in claim 5 and 6, wherein said predetermined criteria is to select the second value if at least one of said determined transmitted values is the second value.
- 10 8. A method as claimed in claim 5 and 6, or claim 7, wherein said predetermined criteria is to select the first value if all of the determined transmitted values are the first value.
- 15 9. A method as claimed in claim 6, 7 or 8, wherein said threshold value is between said possible received values representative of the transmitted first and second values.
- 20 10. A method as claimed in claim 9, wherein said threshold value is such that one of the transmitted power command values is favoured over the other.
- 20 11. A method as claimed in claim 10, wherein first value is favoured over the second value.
- 25 12. A method as claimed in any of claims 6 to 11, wherein the first value is +1 and the second value is -1.
- 30 13. A method as claimed in claim 12 when appended to claim 2, wherein the threshold value is in the range -0.6 to 0.
- 30 14. A method as claimed in claim 13, wherein the threshold value is in the range -.025 and -.30.
- 35 15. A method as claimed in any preceding claim, further comprising the steps of receiving at the second station a signal from said first station, determining the strength of the received signal from the first station and determining from the strength of the received signal the power control command transmitted to the first station.
- 40 16. A method as claimed in claim 5 or any claim appended thereto, said method comprising the steps of combining the

5 received values of said received power control commands, comparing the combined value and the selected value and on the basis of the comparison selecting one of said combined value and the selected value and controlling the power which the first station transmits in accordance therewith.

10

17. A method as claimed in claim 16 when appended to claim 6, wherein the one of the combined value and the selected value which is closer to representing a predetermined one of said first and second transmitted values is selected.

15

18. A method as claimed in claim 17, wherein said predetermined one of said values is the second value.

20

19. A method as claimed in any one of the preceding claims when appended to claim 2, comprising the steps of: outputting a value based on a currently received power control command value and at least one previously received power control value; and comparing said output value and the selected value and on the basis of the comparison selecting one of said output value and the selected value and controlling the power which the first station transmits in accordance therewith.

25

20. A method as claimed in claim 19, comprising the steps of: summing the currently received power control value with the at least one previously received power control command value; comparing the summed value with a predetermined threshold; outputting the determined received value or if a threshold of the summed value is crossed outputting a default value.

30

21. A method as claimed in claim 20, wherein the first station is arranged to transmit signals to a plurality of second stations, each of which second stations is arranged to transmit power control commands to said first station, said method further comprising the steps of determining the values of each of said received power control values and selecting one of said determined received values, in accordance with a predetermined

40

5 criteria, to be summed with the at least one previously received power control values.

22. A method as claimed in any preceding claim, wherein said second station is a base station.

10 23. A method as claimed in any preceding claim, wherein said first station is a mobile station.

24. A method of controlling the power with which a first station transmits signals to a plurality of second stations, comprising the steps of;

15 transmitting from each of the second stations to the first station a power control command having a given value;
receiving said power control commands at said first station;
20 determining the received values of said received power control commands;

combining the received values of said received power control commands; and
controlling the power with which first station transmits to
25 the second station based on said combined value.

25. A method as claimed in claim 24, wherein said transmitted power control command comprises a first value indicating that the power should be increased and a second value indicating that the power should be decreased, and if the combined value exceeds a
30 given threshold, the power with which the first station transmits to second station is one of increased or decreased and if the combined value is below the given threshold, the power with which the first station transmits to the second station is the other
35 of increased or decreased.

26. A method of controlling the power with which a first station transmits signals to a second station, comprising the steps of;
transmitting from the second station to the first station
40 a plurality of power control commands;
receiving said power control commands at said first station;

5 determining the value of said received power control values;
 controlling the power with which the first station transmits
to the second station based on a currently received power control
command and at least one previously received power control
command.

10 27. A method as claimed in claim 26, comprising the steps of
 summing the determined value of the currently received power
 control command with a previously determined value of at least
 one previously received power control command; comparing the
15 summed values with a predetermined threshold; controlling the
 power with which the first station transmits to the second
 station depending on whether or not the threshold is crossed and
 the determined value of the currently received power control
 value.

20 28. A method as claimed in claim 26 or 27, wherein the first
 station is arranged to transmit signals to a plurality of second
 stations, each of which second stations is arranged to transmit
 power control commands to said first station, said method further
25 comprising the steps of determining the values of each of said
 received power control values and selecting one of said
 determined values in accordance with a predetermined criteria as
 the current received value.

30 29. A method as claimed in claim 28, wherein said transmitted
 power control command comprises either a first value indicating
 that the power should be increased or a second value indicating
 that the power should be decreased, and the predetermined
 criteria is to select the received value closer to the second
35 value.

40 30. A method as claimed in claim 27 or any claim appended
 thereto, wherein if the summed value crosses the threshold and
 the determined value of the received power is determined to
 represent a power increase, the power with which the first
 station transmits to second station is decreased.

- 5 31. A method as claimed in claim 27 or any claim appended thereto, wherein if the summed value crosses the threshold and the determined value of the received power is determined to be represent a power increase, the power with which the first station transmits to second station is decreased and the summed
10 value becomes a reset value.
32. A method for controlling the power which a first station transmits signals to a second station comprising the steps of:
transmitting from the second station to the first station
15 a power control command;
receiving said power control command at the first station;
determining, using a plurality of different methods, power control information from said received power control command; and
controlling the power with which the first station transmits
20 to the second station based on the determination step.
33. A method as claimed in claim 32, wherein the power control information obtained from one of said plurality of different methods is used to control the power with which the first station
25 transmits to the second station.
34. A method as claimed in claim 32 or 33, wherein one of said plurality of different methods comprises the steps of determining from the received power control command a parameter
30 representative of the quality with which the power control command is received at the first station, said parameter defining said power control information.
35. A method as claimed in claim 32, 33 or 34, wherein one of said plurality of different methods comprises the steps of determining the received values of a plurality of power control commands received at said first station from a plurality of second stations, combining the received values of the received power control commands to define said power control information.
40
36. A method as claimed in claim any of claims 32 to 35, wherein

5 one of said plurality of different methods comprises the steps
of determining the received values of a plurality of power
control commands received at said first station from said second
station, providing power control information based the currently
received power control command and at least one previously
10 received power control command.

37. A first station which in use transmits signals to a second
station, said first station comprising:

15 means for receiving a power control command transmitted from
said second station to said first station, said power control
command being transmitted with a given value;

determining means for determining from said received power
control command a parameter representative of the quality with
which the power control command is received at the first station;
20 and

control means for controlling the power which the first
station transmits signals based on the determination carried out
by said determining means.

25 38. A first station which in use transmits signals to a
plurality of second stations, said first station comprising:

means for receiving power control commands transmitted from
said second stations to said first station, said power control
commands being transmitted with given values;

30 means for determining the received values of said received
power control commands;

means for combining the received values of said received
power control commands; and

35 means for controlling the power with which first station
transmits to the second station based on said combined value.

39. A first station which in use transmits signals to a second
station, said first station comprising:

40 means for receiving power control commands transmitted from
said second station to said first station;


means for determining the values of said received power




5 control values;

means for controlling the power with which the first station transmits to the second station based on a currently received power control command and at least one previously received power control command.

10

Fig.1.

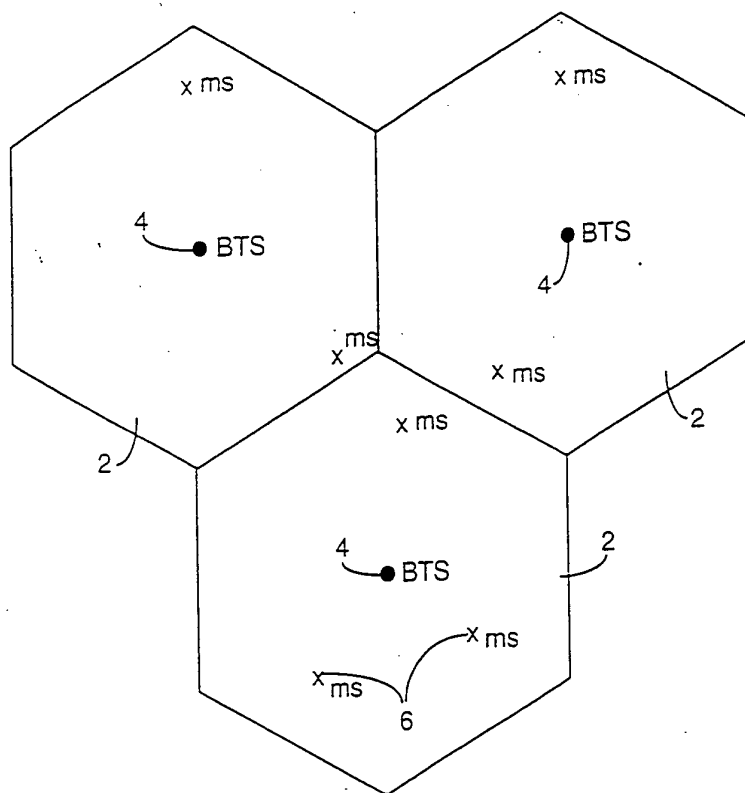

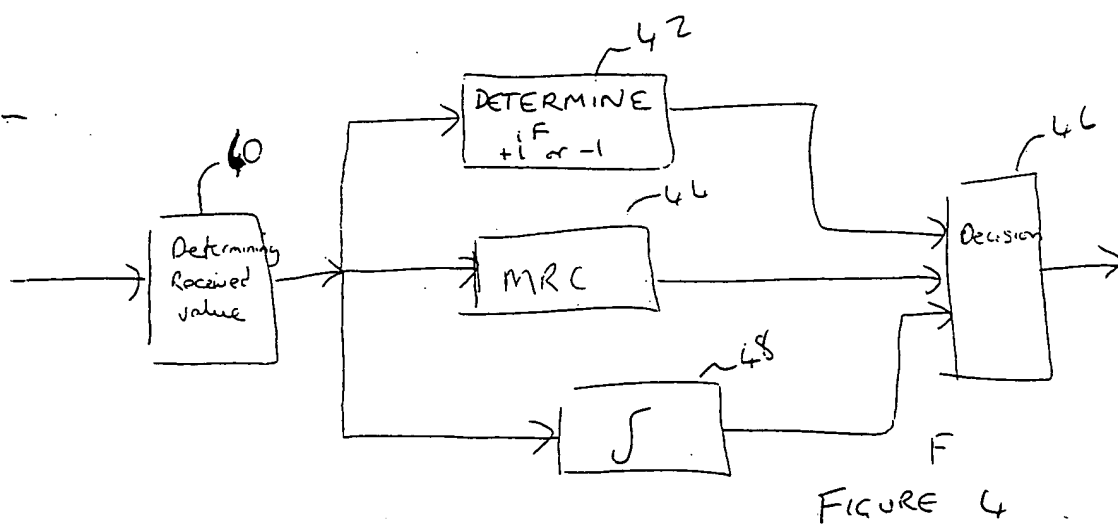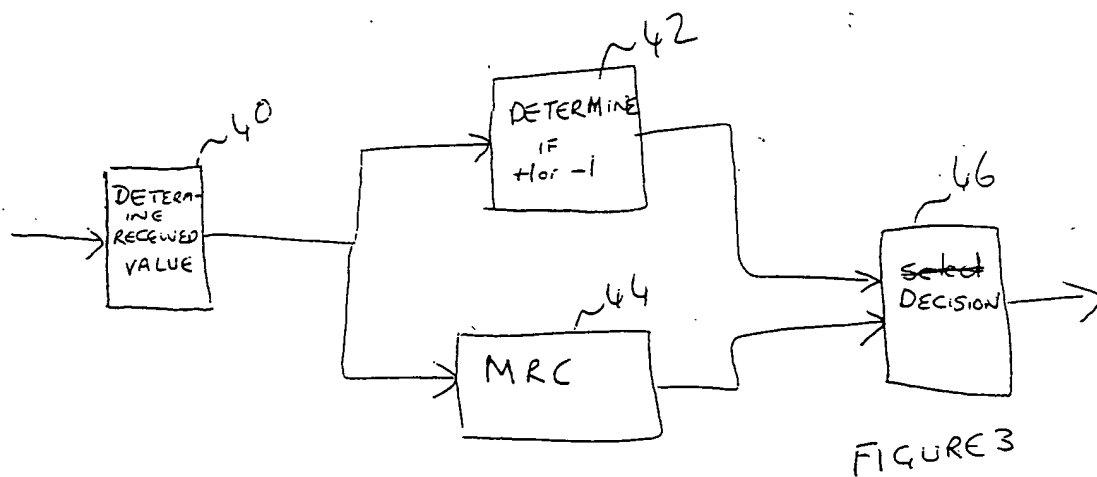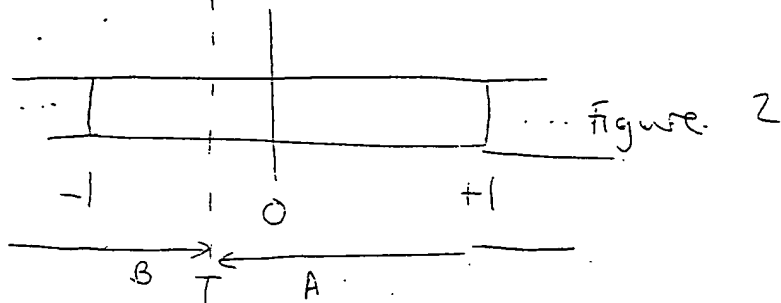

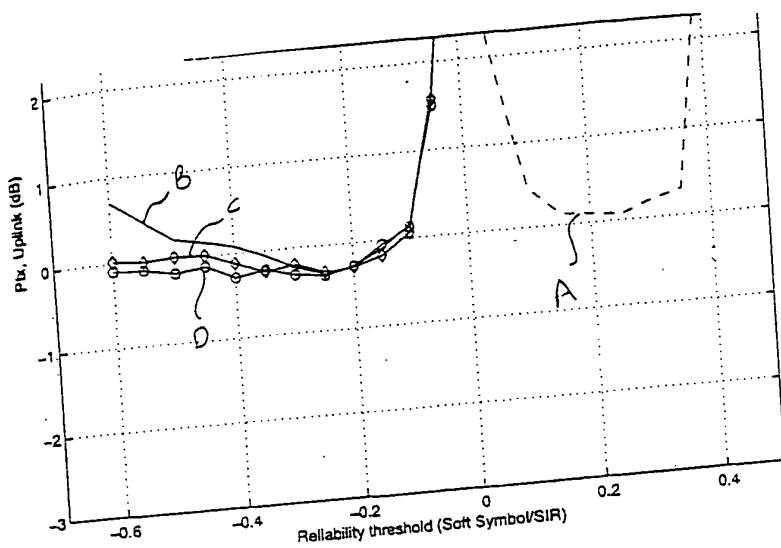


FIGURE S4

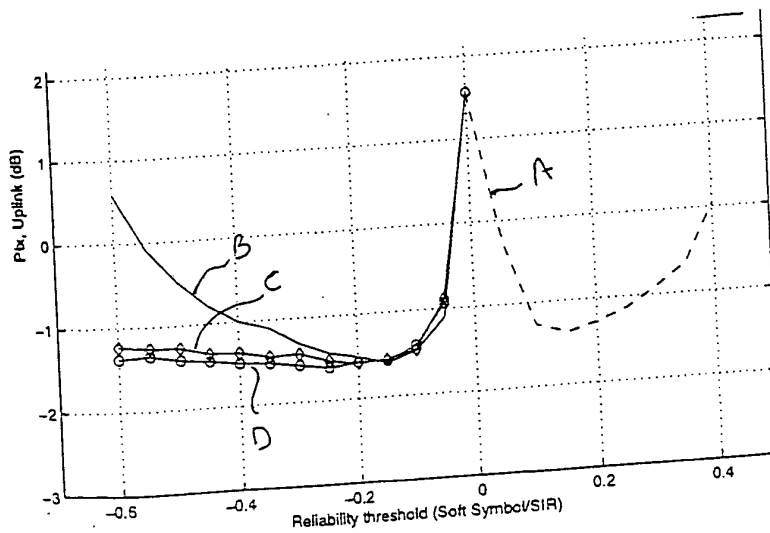


FIGURE S6.

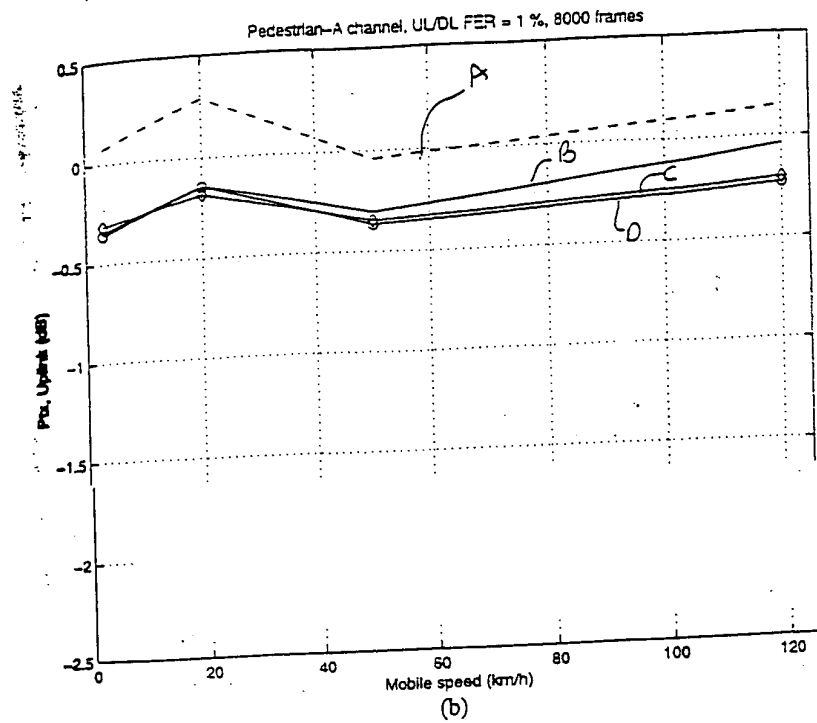


FIGURE 5c

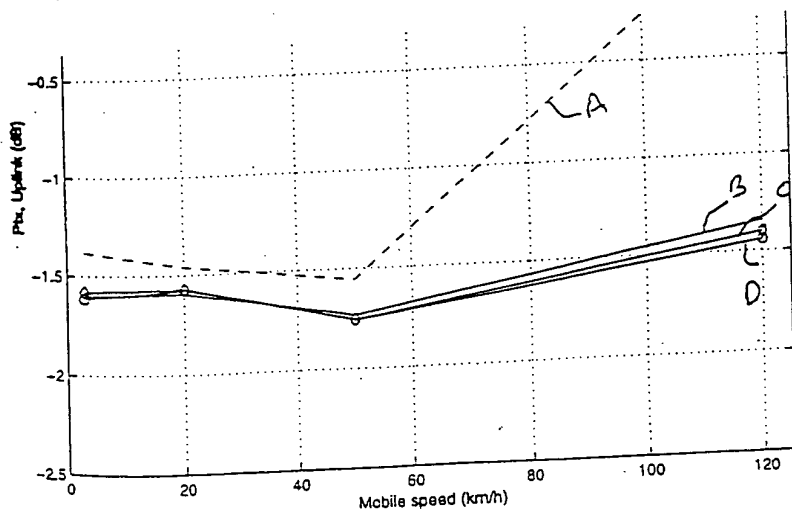


FIGURE 5d